


BROCADE

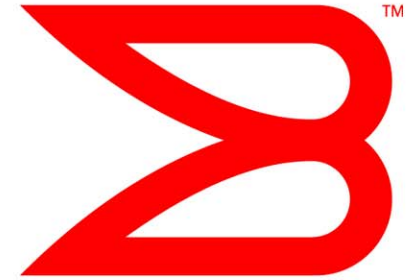

FC-BB_E Open Issues

(08-451v0)

David Peterson
Office of the CTO

August 3, 2008

1. Different Addressing Modes


- Currently it is allowed to transmit a FIP FLOGI requesting SPMA and then transmitting a subsequent FIP FDISC requesting FPMA (and vice-versa)
 - Recommendation: add explicit text to disallow this “feature”

2. Simultaneous FCoE and IP traffic (for SPMA)

- Currently there is no explicit text stating the MAC address used for FCoE and the MAC address for IP (or any other type) should be different
 - Example: to allow IP traffic to flow while denying FCoE traffic per the bridge learning attack scenario
 - Recommendation – for SPMA, specify the MAC address used for FCoE should be different than the MAC address used for other types of traffic



BROCADE

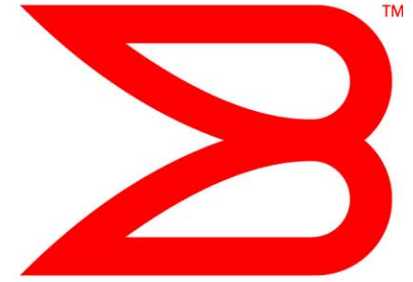

THANK YOU

